



ZANZA
CARPET



**SZÁLLODAI ÉS IRODAI
PADLÓSZŐNYEGEK**



www.zanzacarpet.hu

Brezina

Lano
Carpet Solutions




▲ SB: **BZA.0100** | 400 cm



▲ SB: **BZA.0110** | 400 cm



▲ SB: **BZA.0130** | 400 cm



▲ SB: **BZA.0330** | 400 cm



▲ SB: **BZA.0200** | 400 cm



▲ SB: **BZA.0210** | 400 cm



▲ SB: **BZA.0180** | 400 cm



▲ SB: **BZA.0260** | 400 cm




▲ SB: **BZA.0080** | 400 cm



▲ SB: **BZA.0050** | 400 cm



▲ SB: **BZA.0220** | 400 cm

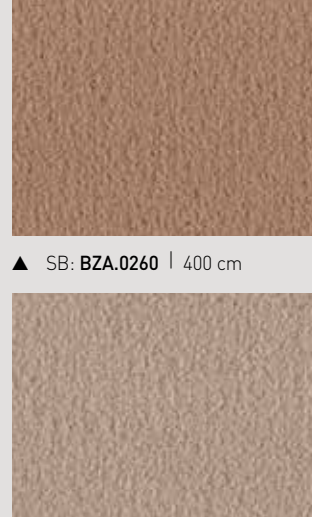


▲ SB: **BZA.0230** | 400 cm



▲ SB: **BZA.0520** | 400 cm



▲ SB: **BZA.0620** | 400 cm




▲ SB: **BZA.0830** | 400 cm



▲ SB: **BZA.0870** | 400 cm



▲ SB: **BZA.0760** | 400 cm



▲ SB: **BZA.0790** | 400 cm



▲ SB: **BZA.0800** | 400 cm





▲ SB: **BZA.0850** | 400 cm

Brezina

Secondary Backing Rugtype • Envers Rücken • Sottofondo	SB	DIN 52612 Thermal retention Warmtedoorlaatweerstand • Résistivité thermique Wärmedurchlaßwiderstand • Resistenza termica	± 0,079 m²/kW
Manufacturing process Fabricagemethode • Technique de fabrication Herstellungsart • Tecnica di fabbricazione	tufted, 1/10" CUT pile	ISO 354 Sound absorption α_s Geluidsdempingsvermogen α_s • Absorption phonique α_s Schallabsorptionsgrad α_s • Grado d'assorbimento acustico α_s	± 0,26 1000 Hz
Pile composition Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa	PA	ISO 11654 Sound absorption α_w Geluidsdempingsvermogen α_w • Absorption phonique α_w Schallabsorptionsgrad α_w • Grado d'assorbimento acustico α_w	± 0,2
Primary backing Tuftdoek • Premier dossier Trägermaterial • Tela di supporto	woven	TOG rating	± 0,79
Width Breedte • Largeur Breite • Altezza	± 400 cm	ISO 6356 2000 Teil 2: Permanently antistatic Permanent antistatisch • Antistatique permanent Permanent antistatisch • Antistatico permanente	< 2 kV
Effective pile height Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile	± 5,0 mm	ISO 6356 2000 Teil 2: Surface resistance RoT Oppervlakteweerstand RoT • Résistance horizontale RoT Oberflächenwiderstand RoT • Resistenza in superficie RoT	≤ 10¹⁰ Ω
Total height Totale dikte • Hauteur totale Gesamthöhe • Spessore totale	± 7,5 mm	ISO 10965 1999 Teil 6: Vertical resistance RdT Doorgangsweerstand RdT • Résistance transversale RdT Durchgangswiderstand RdT • Resistenza ai passaggi RdT	≤ 10¹¹ Ω
Number of knots/sqm Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq	± 252.160	ISO 105 B02 2000 Lightfastness Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce	≥ 5
Pile weight/sqm Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq	± 710 gr	ISO 105 E01 2002 Waterfastness change in colour Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore	≥ 3 - 4
Total weight/m² Totaal gewicht/m² • Poids total/m² Gesamtgewicht/m² • Peso totale/m²	± 1.840 gr	ISO 105 E01 2002 Waterfastness staining Waterechtheid uitbloeding • Solidité à l'eau dégorgement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore	≥ 2 - 3
EN 13501-1 Fire behaviour Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco	B_{fl}-s1	ISO 105 X12 2001 Rubbingfastness dry Wrijftechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco	≥ 3 - 4
EN 1307-2004 Classification Classificatie • Classification Klassifizierung • Classificazione	Class 33 Commercial Heavy	ISO 105 X12 2001 Rubbingfastness wet Wrijftechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido	≥ 3
ISO 140/8 1997 Impact sound insulation Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico	± 25 dB	Ce produit s'inscrit dans la démarche HQE (F.D.E.S. selon la norme NF P01-10 disponible sur demande). F.D.E.S. = fiche de données environnementales et sanitaires.	HQE

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com




Bergamo



▲ KT: BER.0440 | 400 & 500 cm




▲ KT: BER.0220 | 400 & 500 cm



▲ KT: BER.0130 | 400 & 500 cm




▲ KT: BER.0060 | 400 & 500 cm




▲ KT: BER.0070 | 400 & 500 cm



▲ KT: BER.0290 | 400 & 500 cm




▲ KT: BER.0150 | 400 & 500 cm



▲ KT: BER.0140 | 400 & 500 cm




▲ KT: BER.0110 | 400 & 500 cm



▲ KT: BER.0100 | 400 & 500 cm




▲ KT: BER.0870 | 400 & 500 cm



▲ KT: BER.0450 | 400 & 500 cm



▲ KT: BER.0030 | 400 & 500 cm



▲ KT: BER.0090 | 400 & 500 cm




▲ KT: BER.0340 | 400 & 500 cm




▲ KT: BER.0370 | 400 & 500 cm



▲ KT: BER.0880 | 400 & 500 cm




▲ KT: BER.0860 | 400 & 500 cm



▲ KT: BER.0840 | 400 & 500 cm



▲ KT: BER.0001 | 400 & 500 cm



▲ KT: BER.0580 | 400 & 500 cm



▲ KT: BER.0530 | 400 & 500 cm



▲ KT: BER.0760 | 400 & 500 cm



▲ KT: BER.0700 | 400 & 500 cm



▲ KT: BER.0710 | 400 & 500 cm



▲ KT: BER.0780 | 400 & 500 cm



▲ KT: BER.0670 | 400 & 500 cm



▲ KT: BER.0790 | 400 & 500 cm



▲ KT: BER.0810 | 400 & 500 cm



▲ KT: BER.0800 | 400 & 500 cm



▲ KT: BER.0730 | 400 & 500 cm



▲ KT: BER.0740 | 400 & 500 cm

X

A touch of luxury.

Bergamo

Secondary Backing Rugtype • Envers Rücken • Sottofondo • Reverso	KT
Manufacturing process Fabricagemethode • Technique de fabrication Herstellungsart • Tecnica di fabbricazione • Técnica de fabricación	tufted, 5/64" cut pile
Pile composition Pool Samenstelling • Nature du velours Polmaterial • Composizione felpa • Composición de pelo	PA
Primary backing Tuftdoek • Premier dossier Trägermaterial • Tela di supporto • Tela de soporte	woven
Width Breedte • Largeur Breite • Altezza • Ancho	± 400 & 500 cm
Effective pile height Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo	± 5,5 mm
Total height Totale dikte • Hauteur totale Gesamthöhe • Spessore totale • Altura total	± 8,5 mm
Number of knots/sqm Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq • Puntos de pelo/m²	± 388.080
Pile weight/sqm Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq • Peso de pelo/m²	± 705 gr
Total weight/sqm Totaal gewicht/m² • Poids total/m² Gesamtgewicht/m² • Peso totale/m² • Peso total/m²	± 1.850 gr
EN 13501-1 Fire behaviour Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco • Resistencia al fuego	B_{fl}-s1

EN 1307-2004 Classification Classificatie • Classification Klassifizierung • Classificazione • Clasificación al uso	Class 32 Commercial General
ISO 140/8 1997 Impact sound insulation Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico	± 20 dB
TOG rating	± 1,16
ISO 6356 2000 Teil 2: Permanently antistatic Permanent antistatisch • Antistatique permanent Permanent antistatisch • Antistatico permanente	< 2 kV
ISO 105 B02 2000 Lightfastness Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce • Solidez del color a la luz	≥ 5
ISO 105 E01 2002 Waterfastness change in colour Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore Solidez color al agua cambio de color	≥ 3 - 4
ISO 105 E01 2002 Waterfastness staining Waterechtheid uitbloeding • Solidité à l'eau dégorgement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore Solidez color al agua pérdida de color	≥ 2 - 3
ISO 105 X12 2001 Rubbingfastness dry Wrijfechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco Solidez del color a la frotación en seco	≥ 3 - 4
ISO 105 X12 2001 Rubbingfastness wet Wrijfechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido Solidez del color a la frotación en húmedo	≥ 3


(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Bloss



▲ FB: **BLO.0280** | 400 & 500 cm




▲ FB: **BLO.0220** | 400 & 500 cm



▲ FB: **BLO.0240** | 400 & 500 cm



▲ BLO: **BLO.0230** | 400 & 500 cm



▲ FB: **BLO.0460** | 400 & 500 cm



▲ FB: **BLO.0870** | 400 & 500 cm




▲ FB: **BLO.0270** | 400 & 500 cm



▲ FB: **BLO.0840** | 400 & 500 cm



▲ FB: **BLO.0860** | 400 & 500 cm




▲ FB: **BLO.0140** | 400 & 500 cm



▲ FB: **BLO.0820** | 400 & 500 cm



▲ FB: **BLO.0740** | 400 & 500 cm



▲ FB: **BLO.0630** | 400 & 500 cm



▲ FB: **BLO.0310** | 400 & 500 cm



▲ FB: **BLO.0010** | 400 & 500 cm



▲ FB: **BLO.0790** | 400 & 500 cm



▲ FB: **BLO.0730** | 400 & 500 cm



▲ FB: **BLO.0100** | 400 & 500 cm

X


A touch of luxury.

Bloss

Secondary Backing	FB
Rugtype • Envers Rücken • Sottofondo • Reverse	
Manufacturing process	tufted, 1/10" cut pile
Fabricagemethode • Technique de fabrication Herstellungsart • Tecnica di fabbricazione • Técnica de fabricación	
Pile composition	PA
Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa • Composición de pelo	
Primary backing	woven
Tuftdoek • Premier dossier Trägermaterial • Tela di supporto • Tela de soporte	
Width	± 400 & 500 cm
Breedte • Largeur Breite • Altezza • Ancho	
Effective pile height	± 6,0 mm
Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo	
Total height	± 9,0 mm
Totale dikte • Hauteur totale Gesamthöhe • Spessore totale • Altura total	
Number of knots/sqm	± 193.060
Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq • Puntos de pelo/m²	
Pile weight/sqm	± 1.210 gr
Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq • Peso de pelo/m²	
Total weight/sqm	± 2.350 gr
Totaal gewicht/m² • Poids total/m² Gesamtwegicht/m² • Peso totale/m² • Peso total/m²	
EN 13501-1 Fire behaviour	C_{fl}-s1
Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco • Resistencia al fuego	


EN 1307-2004 Classification	Class 31
Classificatie • Classification Klassifizierung • Classificazione • Clasificación al uso	
TOG rating	± 1,4
ISO 105 B02 2000 Lightfastness	≥ 5
Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce • Solidez del color a la luz	
ISO 105 E01 2002 Waterfastness change in colour	≥ 3 - 4
Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore Solidez color al agua cambio de color	
ISO 105 E01 2002 Waterfastness staining	≥ 2 - 3
Waterechtheid uitbloeding • Solidité à l'eau dégorgeement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore Solidez color al agua pérdida de color	
ISO 105 X12 2001 Rubbingfastness dry	≥ 3 - 4
Wrijftechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco Solidez del color a la frotación en seco	
ISO 105 X12 2001 Rubbingfastness wet	≥ 3
Wrijftechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido Solidez del color a la frotación en húmedo	

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Carve Classic


Lano
Carpet Solutions



▲ FBP: **CFA.0840** | 400 cm




▲ FBP: **CFA.0821** | 400 cm



▲ FBP: **CFA.0810** | 400 cm



▲ FBP: **CFA.0790** | 400 cm



▲ FBP: **CFA.0431** | 400 cm




▲ FBP: **CFA.0420** | 400 cm




▲ FBP: **CFA.0410** | 400 cm



▲ FBP: **CFA.0710** | 400 cm

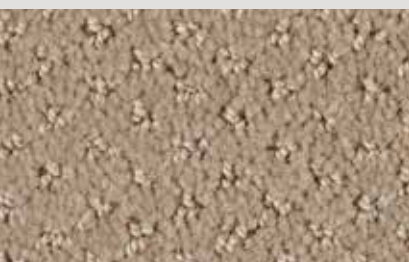


▲ FBP: **CFA.0251** | 400 cm



▲ FBP: **CFA.0120** | 400 cm




▲ FBP: **CFA.0100** | 400 cm



▲ FBP: **CFA.0530** | 400 cm



▲ FBP: **CFA.0261** | 400 cm



▲ FBP: **CFA.0310** | 400 cm



▲ FBP: **CFA.0280** | 400 cm



▲ FBP: **CFA.0291** | 400 cm



Carve Classic

Secondary Backing Rugtype • Envers Rücken • Sottofondo	FBP	ISO 354 Sound absorption α_s Geluidsdempingsvermogen α_s • Absorption phonique α_s Schallabsorptionsgrad α_s • Grado d'assorbimento acustico α_s	± 0,32 (1000 Hz)
Manufacturing process Fabricagemethode • Technique de fabrication Herstellungsart • Tecnica di fabbricazione	tufted, 1/10" cut loop	ISO 11654 Sound absorption α_w Geluidsdempingsvermogen α_w • Absorption phonique α_w Schallabsorptionsgrad α_w • Grado d'assorbimento acustico α_w	± 0,35
Pile composition Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa	PA	DIN 52612 Thermal retention Warmteoorlaatweerstand • Résistivité thermique Wärmedurchlaßwiderstand • Resistenza termica	± 0,147 m²/kW
Primary backing Tuftdoek • Premier dossier Trägermaterial • Tela di supporto	non woven	TOG rating	± 1,47
Width Breedte • Largeur Breite • Altezza	± 400 cm	ISO 6356 Teil 2 Permanently antistatic Permanent antistatisch • Antistatique permanent Permanent antistatisch • Antistatico permanente	< 2 kV
Effective pile height Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile	± 6,0 mm	ISO 6356 Teil 6 Surface resistance RoT Oppervlakteweerstand RoT • Résistance horizontale RoT Oberflächenwiderstand RoT • Resistenza in superficie RoT	≤ 10¹¹ Ω
Total height Totale dikte • Hauteur totale Gesamthöhe • Spessore totale	± 10 mm	ISO 10965 Teil 6 Vertical resistance RdT Doorgangsweerstand RdT • Résistance transversale RdT Durchgangswiderstand RdT • Resistenza ai passaggi RdT	≤ 10¹⁰ Ω
Number of knots/sqm Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq	± 204.880	ISO 105 B02 2000 Lightfastness Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce	≥ 5
Pile weight/sqm Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq	± 1.180 gr	ISO 105 E01 2002 Waterfastness change in colour Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore	≥ 3-4
Total weight/sqm Totaal gewicht/m² • Poids total/m² Gesamtwegicht/m² • Peso totale/m²	± 2.540 gr	ISO 105 E01 2002 Waterfastness staining Waterechtheid uitbloeding • Solidité à l'eau dégorgement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore	≥ 3-4
EN 13501-1 Fire behaviour Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco	B_{fl}-s1	ISO 105 X12 2001 Rubbingfastness dry Wrijftechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco	≥ 3-4
EN 1307-2004 Classification Classificatie • Classification Klassifizierung • Classificazione	Class 32 Commercial General	ISO 105 X12 2001 Rubbingfastness wet Wrijftechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido	≥ 3
ISO 140/8 1997 Impact sound insulation Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico	± 31 dB	Ce produit s'inscrit dans la démarche HQE (F.D.E.S. selon la norme NF P01-10 disponible sur demande). F.D.E.S. = fiche de données environnementales et sanitaires.	HQE

[4] These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



14
EN 14041
DOP-1038-118683
NB 0493



LANO NV - Venetiëlaan 33
B-8530 HARELBEKE
Floor carpets to use in
buildings



UPEC
3 3 1 0
11/279
<http://evaluation.cstb.fr>



ISO 9001
BQA_QMS019_C_199460



ACBDA64D
www.gr-ds.info



ÉMISSIONS DANS L'AIR INTÉRIEUR



A+ A B C



REACH
The new EU chemicals legislation

Carve Linea



▲ FBP: CFB.0062 | 400 cm



▲ FBP: CFB.0251 | 400 cm



▲ FBP: CFB.0431 | 400 cm



▲ FBP: CFB.0122 | 400 cm



▲ FBP: CFB.0182 | 400 cm



▲ FBP: CFB.0410 | 400 cm



▲ FBP: CFB.0840 | 400 cm



▲ FBP: CFB.0261 | 400 cm




▲ FBP: CFB.0192 | 400 cm



▲ FBP: CFB.0821 | 400 cm




▲ FBP: CFB.0012 | 400 cm



▲ FBP: CFB.0852 | 400 cm



▲ FBP: CFB.0722 | 400 cm



▲ FBP: CFB.0662 | 400 cm



▲ FBP: CFB.0812 | 400 cm



▲ FBP: CFB.0802 | 400 cm

Carve Linea

Secondary Backing Rugtype • Envers Rücken • Sottofondo	FBP	ISO 354 Sound absorption α_s Geluidsdempingsvermogen α_s • Absorption phonique α_s Schallabsorptionsgrad α_s • Grado d'assorbimento acustico α_s	± 0,32 (1000 Hz)
Manufacturing process Fabricagemethode • Technique de fabrication Herstellungsart • Tecnica di fabbricazione	tufted, 1/10" cut loop	ISO 11654 Sound absorption α_w Geluidsdempingsvermogen α_w • Absorption phonique α_w Schallabsorptionsgrad α_w • Grado d'assorbimento acustico α_w	± 0,35
Pile composition Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa	PA	DIN 52612 Thermal retention Warmtedoorlaatweerstand • Résistivité thermique Wärmedurchlaßwiderstand • Resistenza termica	± 0,147 m²/kW
Primary backing Tuftdoek • Premier dossier Trägermaterial • Tela di supporto	non woven	TOG rating	± 1,47
Width Breedte • Largeur Breite • Altezza	± 400 cm	ISO 6356 Teil 2 Permanently antistatic Permanent antistatisch • Antistatique permanent Permanent antistatisch • Antistatico permanente	< 2 kV
Effective pile height Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile	± 6,0 mm	ISO 6356 Teil 6 Surface resistance RoT Oppervlakteweerstand RoT • Résistance horizontale RoT Oberflächenwiderstand RoT • Resistenza in superficie RoT	≤ 10¹¹ Ω
Total height Totale dikte • Hauteur totale Gesamthöhe • Spessore totale	± 10 mm	ISO 10965 Teil 6 Vertical resistance RdT Doorgangsweerstand RdT • Résistance transversale RdT Durchgangswiderstand RdT • Resistenza ai passaggi RdT	≤ 10¹⁰ Ω
Number of knots/sqm Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq	± 204.880	ISO 105 B02 2000 Lightfastness Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce	≥ 5
Pile weight/sqm Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq	± 1.180 gr	ISO 105 E01 2002 Waterfastness change in colour Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore	≥ 3-4
Total weight/sqm Totaal gewicht/m² • Poids total/m² Gesamtgewicht/m² • Peso totale/m²	± 2.540 gr	ISO 105 E01 2002 Waterfastness staining Waterechtheid uitbloeding • Solidité à l'eau dégorgement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore	≥ 3-4
EN 13501-1 Fire behaviour Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco	B_{fl}-s1	ISO 105 X12 2001 Rubbingfastness dry Wrijftechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco	≥ 3-4
EN 1307-2004 Classification Classificatie • Classification Klassifizierung • Classificazione	Class 32 Commercial General	ISO 105 X12 2001 Rubbingfastness wet Wrijftechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido	≥ 3
ISO 140/8 1997 Impact sound insulation Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico	± 31 dB	Ce produit s'inscrit dans la démarche HQE (F.D.E.S. selon la norme NF P01-10 disponible sur demande). F.D.E.S. = fiche de données environnementales et sanitaires.	HQE

[1] These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading/pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Casanova



▲ SB: CAS.760 | 400 cm



▲ SB: CAS.870 | 400 cm



▲ SB: CAS.440 | 400 cm



▲ SB: CAS.830 | 400 cm



▲ SB: CAS.850 | 400 cm



▲ SB: CAS.250 | 400 cm



▲ SB: CAS.130 | 400 cm



▲ SB: CAS.140 | 400 cm




▲ SB: CAS.230 | 400 cm



▲ SB: CAS.330 | 400 cm



▲ SB: CAS.180 | 400 cm



▲ SB: CAS.150 | 400 cm



▲ SB: CAS.710 | 400 cm



▲ SB: CAS.310 | 400 cm



▲ SB: CAS.120 | 400 cm



▲ SB: CAS.520 | 400 cm



▲ SB: CAS.730 | 400 cm



X

A touch of luxury.

Casanova

Secondary Backing Rugtype • Envers Rücken • Sottofondo • Reverso	SB
Manufacturing process Fabricagemethode • Technique de fabrication Herstellungsart • Tecnica di fabbricazione • Técnica de fabricación	tufted, 3/16" cut pile
Pile composition Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa • Composición de pelo	100% PA
Primary backing Tuftdoek • Premier dossier Trägermaterial • Tela di supporto • Tela de soporte	woven
Width Breedte • Largeur Breite • Altezza • Ancho	± 400 cm
Effective pile height Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo	± 12,5 mm
Total height Totale dikte • Hauteur totale Gesamthöhe • Spessore totale • Altura total	± 15 mm
Number of knots/sqm Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq • Puntos de pelo/m²	± 68.250
Pile weight/sqm Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq • Peso de pelo/m²	± 3.370 gr
Total weight/sqm Totaal gewicht/m² • Poids total/m² Gesamtgewicht/m² • Peso totale/m² • Peso total/m²	± 4.630 gr

EN 13501-1 Fire behaviour Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco • Resistencia al fuego	B_{fl}-s1
EN 1307-2004 Classification Classificatie • Classification Klassifizierung • Classificazione • Clasificación al uso	Class 22 Domestic General/Medium
ISO 140/8 1997 Impact sound insulation Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico • Aislamiento acústico	± 25 dB
ISO 105 B02 2000 Lightfastness Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce • Solidez del color a la luz	≥ 5
ISO 105 E01 2002 Waterfastness change in colour Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore Solidez color al agua cambio de color	≥ 3 - 4
ISO 105 E01 2002 Waterfastness staining Waterechtheid uitbloeding • Solidité à l'eau dégorgeement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore Solidez color al agua pérdida de color	≥ 2 - 3
ISO 105 X12 2001 Rubbingfastness dry Wrijftechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco Solidez del color a la frotación en seco	≥ 3 - 4
ISO 105 X12 2001 Rubbingfastness wet Wrijftechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido Solidez del color a la frotación en húmedo	≥ 3

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Euphoria



▲ SMB: **EUP.0590** | 400 & 500 cm



▲ SMB: **EUP.0540** | 400 & 500 cm




▲ SMB: **EUP.0370** | 400 & 500 cm



▲ SMB: **EUP.0180** | 400 & 500 cm



▲ SMB: **EUP.0710** | 400 & 500 cm



▲ SMB: **EUP.0070** | 400 & 500 cm



▲ SMB: **EUP.0110** | 400 & 500 cm



▲ SMB: **EUP.0260** | 400 & 500 cm



▲ SMB: **EUP.0790** | 400 & 500 cm



▲ SMB: **EUP.0250** | 400 & 500 cm




▲ SMB: **EUP.0810** | 400 & 500 cm




▲ SMB: **EUP.0880** | 400 & 500 cm



▲ SMB: **EUP.0820** | 400 & 500 cm



▲ SMB: **EUP.0830** | 400 & 500 cm



▲ SMB: **EUP.0850** | 400 & 500 cm



▲ SMB: **EUP.0840** | 400 & 500 cm

X

A touch of luxury.

Euphoria

Secondary Backing

Rugtype • Envers
Rücken • Sottotondo • Reverso

SMB

Manufacturing process

Fabricagemethode • Technique de fabrication
Herstellungsverfahren • Tecnica di fabbricazione • Técnica de fabricación

1/10" TWIST

Pile composition

Poolsamenstelling • Nature du velours
Polmaterial • Composizione felpa • Composición de pelo

PA

Primary backing

Tuftdoek • Premier dossier
Trägermaterial • Tela di supporto • Tela de soporte

woven

Width

Breedte • Largeur
Breite • Altezza • Ancho

± 400 & 500 cm

Effective pile height

Nuttige poolhoogte • Hauteur de velours utile
Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo

± 9,5 mm

Total height

Totale dikte • Hauteur totale
Gesamthöhe • Spessore totale • Altura total

± 12,0 mm

Number of knots/sqm

Aantal noppen/m² • Nombre de points/m²
Noppenzahl/m² • Numero di punti/mq • Puntos de pelo/m²

± 204.880

Pile weight/sqm

Poolinzetgewicht/m² • Poids mis en oeuvre/m²
Poleinsatzgewicht/m² • Peso felpa/mq • Peso de pelo/m²

± 2.175 gr

Total weight/sqm

Totaal gewicht/m² • Poids total/m²
Gesamtwicht/m² • Peso totale/m² • Peso total/m²

± 3.160 gr

EN 13501-1 Fire behaviour

Brandgedrag • Comportement au feu
Brennverhalten • Reazione al fuoco • Resistencia al fuego

B_{fl}-s1

EN 1307-2004 Classification

Classificatie • Classification
Klassifizierung • Classificazione • Clasificación al uso

Class 32

Commercial General

ISO 140/8 1997 Impact sound insulation

Contactgeluidsisolatie • Isolation aux bruits d'impact
Trittschallverbesserungsmaß • Miglioramento acustico • Aislamiento acústico

± 25 dB

TOG Rating

± 1,6

ISO 105 B02 2000 Lightfastness

Lichtechtheid • Solidité à la lumière
Lichtechtheit • Solidità colori alla luce • Solidez del color a la luz

≥ 5

ISO 105 E01 2002 Waterfastness change in colour

Waterrechtheid verkleuring • Solidité à l'eau changement couleur
Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore
Solidez color al agua cambio de color

≥ 3 - 4

ISO 105 E01 2002 Waterfastness staining

Waterrechtheid uitbloeding • Solidité à l'eau dégorgeement
Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore
Solidez color al agua pérdida de color

≥ 2 - 3

ISO 105 X12 2001 Rubbingfastness dry

Wrijfechtheid droog • Solidité au frottement sec
Reibungechtheit trocken • Solidità colori allo sfregamento a secco
Solidez del color a la frotación en seco

≥ 3 - 4

ISO 105 X12 2001 Rubbingfastness wet

Wrijfechtheid nat • Solidité au frottement humide
Reibungechtheit nass • Solidità colori allo sfregamento umido
Solidez del color a la frotación en húmedo

≥ 3

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Flair Concrete

Lano
Carpet Solutions




▲ SB: FLC.0703 | 400 cm




▲ SB: FLC.0843 | 400 cm




▲ SB: FLC.0893 | 400 cm

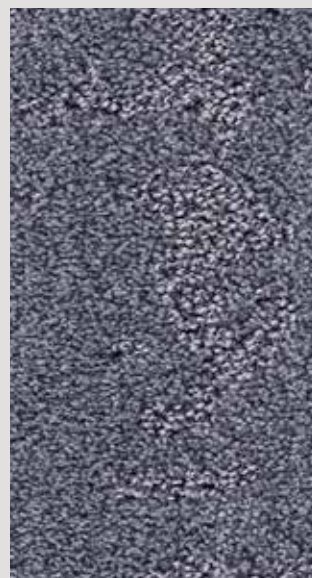

▲ SB: FLC.0853 | 400 cm

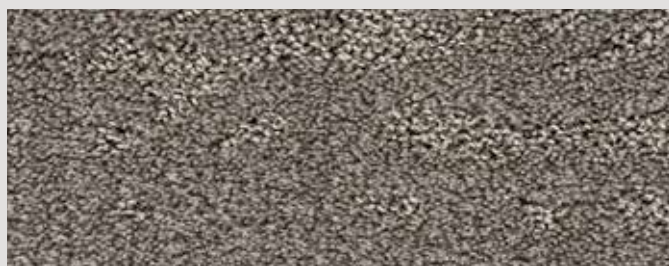

▲ SB: FLC.0863 | 400 cm

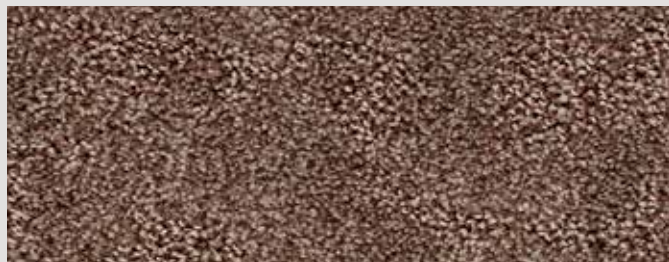

▲ SB: FLC.0183 | 400 cm



Flair Concrete

Secondary Backing

Rugtype • Envers
Rücken • Sottofondo

SB

Manufacturing process

Fabricagemethode • Technique de fabrication
Herstellungsart • Tecnica di fabbricazione

tufted, 1/10" cut loop

Pile composition

Poolsamenstelling • Nature du velours
Polmaterial • Composizione felpa

PA

Primary backing

Tuftdoek • Premier dossier
Trägermaterial • Tela di supporto

non woven

Width

Breedte • Largeur
Breite • Altezza

± 400 cm

Effective pile height

Nuttige poolhoogte • Hauteur de velours utile
Tatsächliche Florhöhe • Spessore felpa utile

± 6,0 mm

Total height

Totale dikte • Hauteur totale
Gesamthöhe • Spessore totale

± 8,5 mm

Number of knots/sqm

Aantal noppen/m² • Nombre de points/m²
Noppenzahl/m² • Numero di punti/mq

± 236.400

Pile weight/sqm

Poolinzetgewicht/m² • Poids mis en oeuvre/m²
Poleinsatzgewicht/m² • Peso felpa/mq

± 1.000 gr

Total weight/sqm

Totaal gewicht/m² • Poids total/m²
Gesamtgewicht/m² • Peso totale/m²

± 2.250 gr

EN 13501-1 Fire behaviour

Brandgedrag • Comportement au feu
Brennverhalten • Reazione al fuoco

B_f-s1

EN 1307-2004 Classification

Classificatie • Classification
Klassifizierung • Classificazione

Class 33

Commercial Heavy

ISO 140/8 1997 Impact sound insulation

Contactgeluidsisolatie • Isolation aux bruits d'impact
Trittschallverbesserungsmaß • Miglioramento acustico

± 25 dB

ISO 6356 Teil 2 Permanently antistatic

Permanent antistatisch • Antistatique permanente
Permanent antistatisch • Antistatico permanente

< 2 kV

ISO 105 B02 2000 Lightfastness

Lichtechtheid • Solidité à la lumière
Lichtechtheid • Solidità colori alla luce

≥ 5

ISO 105 E01 2002 Waterfastness change in colour

Waterechtheid verkleuring • Solidité à l'eau changement couleur
Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore

≥ 3-4

ISO 105 E01 2002 Waterfastness staining

Waterechtheid uitbloeding • Solidité à l'eau dégorgement
Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore

≥ 2-3

ISO 105 X12 2001 Rubbingfastness dry

Wrijftechtheid droog • Solidité au frottement sec
Reibungechtheit trocken • Solidità colori allo sfregamento a secco

≥ 3-4

ISO 105 X12 2001 Rubbingfastness wet

Wrijftechtheid nat • Solidité au frottement humide
Reibungechtheit nass • Solidità colori allo sfregamento umido

≥ 3

[4] These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Flair Dune


Lano
Carpet Solutions




▲ SB: FLR.0083 | 400 cm



▲ SB: FLR.0103 | 400 cm



▲ SB: FLR.0302 | 400 cm

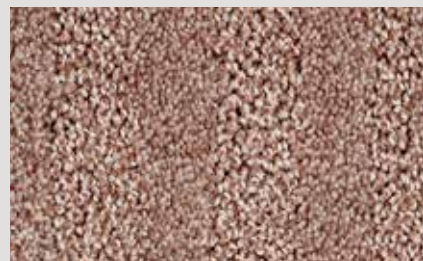

▲ SB: FLR.0173 | 400 cm




▲ SB: FLR.0183 | 400 cm



▲ SB: LFR.0792 | 400 cm



▲ SB: FLR.0733 | 400 cm



▲ SB: FLR.0853 | 400 cm



▲ SB: FLR.0703 | 400 cm



▲ SB: FLR.0813 | 400 cm




▲ SB: FLR.0863 | 400 cm



▲ SB: FLR.0843 | 400 cm



▲ SB: FLR.0893 | 400 cm



▲ SB: FLR.0882 | 400 cm



Flair Dune

Secondary Backing

Rugtype • Envers
Rücken • Sottofondo

SB

Manufacturing process

Fabricagemethode • Technique de fabrication
Herstellungsart • Tecnica di fabbricazione

tufted, 1/10" cut loop

Pile composition

Poolsamenstelling • Nature du velours
Polmaterial • Composizione felpa

PA

Primary backing

Tuftdoek • Premier dossier
Trägermaterial • Tela di supporto

non woven

Width

Breedte • Largeur
Breite • Altezza

± 400 cm

Effective pile height

Nuttige poolhoogte • Hauteur de velours utile
Tatsächliche Florhöhe • Spessore felpa utile

± 6,0 mm

Total height

Totale dikte • Hauteur totale
Gesamthöhe • Spessore totale

± 8,5 mm

Number of knots/sqm

Aantal noppen/m² • Nombre de points/m²
Noppenzahl/m² • Numero di punti/mq

± 236.400

Pile weight/sqm

Poolinzetgewicht/m² • Poids mis en oeuvre/m²
Poleinsatzgewicht/m² • Peso felpa/mq

± 1.000 gr

Total weight/sqm

Totaal gewicht/m² • Poids total/m²
Gesamtgewicht/m² • Peso totale/m²

± 2.250 gr

EN 13501-1 Fire behaviour

Brandgedrag • Comportement au feu
Brennverhalten • Reazione al fuoco

B_{fl}-s1

EN 1307-2004 Classification

Classificatie • Classification
Klassifizierung • Classificazione

Class 33

Commercial Heavy

ISO 140/8 1997 Impact sound insulation

Contactgeluidsisolatie • Isolation aux bruits d'impact
Trittschallverbesserungsmaß • Miglioramento acustico

± 25 dB

ISO 6356 Teil 2 Permanently antistatic

Permanent antistatisch • Antistatique permanente
Permanent antistatisch • Antistatico permanente

< 2 kV

ISO 105 B02 2000 Lightfastness

Lichtechtheid • Solidité à la lumière
Lichtechtheid • Solidità colori alla luce

≥ 5

ISO 105 E01 2002 Waterfastness change in colour

Waterechtheid verkleuring • Solidité à l'eau changement couleur
Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore

≥ 3-4

ISO 105 E01 2002 Waterfastness staining

Waterechtheid uitbloeding • Solidité à l'eau dégorgement
Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore

≥ 2-3

ISO 105 X12 2001 Rubbingfastness dry

Wrijftechtheid droog • Solidité au frottement sec
Reibungechtheit trocken • Solidità colori allo sfregamento a secco

≥ 3-4

ISO 105 X12 2001 Rubbingfastness wet

Wrijftechtheid nat • Solidité au frottement humide
Reibungechtheit nass • Solidità colori allo sfregamento umido

≥ 3

[4] These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Granit


Lano
Carpet Solutions



▲ SB: **GRT.0257** | 400 & 500 cm



▲ SB: **GRT.0220** | 400 & 500 cm



▲ SB: **GRT.0121** | 400 & 500 cm



▲ SB: **GRT.0110** | 400 & 500 cm



▲ SB: **GRT.0680** | 400 & 500 cm



▲ SB: **GRT.0269** | 400 & 500 cm



▲ SB: **GRT.0300** | 400 & 500 cm



▲ SB: **GRT.0134** | 400 & 500 cm



▲ SB: **GRT.0570** | 400 & 500 cm



▲ SB: **GRT.0270** | 400 & 500 cm



▲ SB: **GRT.0410** | 400 & 500 cm



▲ SB: **GRT.0400** | 400 & 500 cm



▲ SB: **GRT.0843** | 400 & 500 cm



▲ SB: **GRT.0858** | 400 & 500 cm



▲ SB: **GRT.0820** | 400 & 500 cm



▲ SB: **GRT.0810** | 400 & 500 cm



▲ SB: **GRT.0764** | 400 & 500 cm



▲ SB: **GRT.0842** | 400 & 500 cm



▲ SB: **GRT.0827** | 400 & 500 cm



▲ SB: **GRT.0802** | 400 & 500 cm



▲ SB: **GRT.0730** | 400 & 500 cm



▲ SB: **GRT.0700** | 400 & 500 cm



▲ SB: **GRT.0793** | 400 & 500 cm





▲ SB: **GRT.0819** | 400 & 500 cm


Granit

Secondary Backing Rugtype • Envers Rücken • Sottofondo	SB	ISO 354 Sound absorption α_s Geluidsdempingsvermogen α_s • Absorption phonique α_s Schallabsorptionsgrad α_s • Grado d'assorbimento acustico α_s	± 0,15 (1000 Hz)
Manufacturing process Fabricagemethode • Technique de fabrication Herstellungsart • Tecnica di fabbricazione	tufted, 1/10" loop pile	ISO 11654 Sound absorption α_w Geluidsdempingsvermogen α_w • Absorption phonique α_w Schallabsorptionsgrad α_w • Grado d'assorbimento acustico α_w	± 0,15
Pile composition Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa	PA	DIN 52612 Thermal retention Warmtedoorlaatweerstand • Résistivité thermique Wärmedurchlaßwiderstand • Resistenza termica	± 0,072 m²/kW
Primary backing Tuftdoek • Premier dossier Trägermaterial • Tela di supporto	woven	TOG rating	± 0,72
Width Breedte • Largeur Breite • Altezza	± 400 & 500 cm	ISO 6356 2000 Teil 2: Permanently antistatic Permanent antistatisch • Antistatique permanent Permanent antistatisch • Antistatico permanente	< 2 kV
Effective pile height Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile	± 3,0 mm	ISO 6356 2000 Teil 2: Surface resistance RoT Oppervlakteweerstand RoT • Résistance horizontale RoT Oberflächenwiderstand RoT • Resistenza in superficie RoT	≤ 10¹¹ Ω
Total height Totale dikte • Hauteur totale Gesamthöhe • Spessore totale	± 5,0 mm	ISO 10965 1999 Teil 6: Vertical resistance RdT Doorgangsweerstand RdT • Résistance transversale RdT Durchgangswiderstand RdT • Resistenza ai passaggi RdT	≤ 10¹¹ Ω
Number of knots/sqm Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq	± 173.360	ISO 105 B02 2000 Lightfastness Lichtechtheid • Solidité à la lumière Lichtechtheid • Solidità colori alla luce	≥ 6
Pile weight/sqm Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq	± 460 gr	ISO 105 E01 2002 Waterfastness change in colour Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore	≥ 4
Total weight/sqm Totaal gewicht/m² • Poids total/m² Gesamtgewicht/m² • Peso totale/m²	± 1.630 gr	ISO 105 E01 2002 Waterfastness staining Waterechtheid uitbloeding • Solidité à l'eau dégorgement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore	≥ 4
EN 13501-1 Fire behaviour Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco	C_{fl}-s1	ISO 105 X12 2001 Rubbingfastness dry Wrijftechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco	≥ 4
EN 1307-2004 Classification Classificatie • Classification Klassifizierung • Classificazione	Class 33 Commercial Heavy	ISO 105 X12 2001 Rubbingfastness wet Wrijftechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido	≥ 4
ISO 140/8 1997 Impact sound insulation Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico	± 22 dB	Ce produit s'inscrit dans la démarche HQE (F.D.E.S. selon la norme NF P01-10 disponible sur demande). F.D.E.S. = fiche de données environnementales et sanitaires.	HQE

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Harmony



▲ SMB: HRM.0780 | 400 & 500 cm



▲ SMB: HRM.0110 | 400 & 500 cm



▲ SMB: HRM.0120 | 400 & 500 cm



▲ SMB: HRM.0250 | 400 & 500 cm



▲ SMB: HRM.0210 | 400 & 500 cm



▲ SMB: HRM.0150 | 400 & 500 cm



▲ SMB: HRM.0090 | 400 & 500 cm



▲ SMB: HRM.0450 | 400 & 500 cm



▲ SMB: HRM.0790 | 400 & 500 cm



▲ SMB: HRM.0810 | 400 & 500 cm



▲ SMB: HRM.0830 | 400 & 500 cm




▲ SMB: HRM.0440 | 400 & 500 cm



▲ SMB: HRM.0720 | 400 & 500 cm



▲ SMB: HRM.0870 | 400 & 500 cm



▲ SMB: HRM.0860 | 400 & 500 cm



▲ SMB: HRM.0880 | 400 & 500 cm

X

A touch of luxury.

Harmony

Secondary Backing

Rugtype • Envers
Rücken • Sottofondo • Reverso

SMB

Manufacturing process

Fabricagemethode • Technique de fabrication
Herstellungsverfahren • Tecnica di fabbricazione • Técnica de fabricación

1/10" cut pile

Pile composition

Poolsamenstelling • Nature du velours
Polmaterial • Composizione felpa • Composición de pelo

PA

Primary backing

Tuftdoek • Premier dossier
Trägermaterial • Tela di supporto • Tela de soporte

woven

Width

Breedte • Largeur
Breite • Altezza • Ancho

± 400 & 500 cm

Effective pile height

Nuttige poolhoogte • Hauteur de velours utile
Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo

± 7,5 mm

Total height

Totale dikte • Hauteur totale
Gesamthöhe • Spessore totale • Altura total

± 9,5 mm

Number of knots/sqm

Aantal noppen/m² • Nombre de points/m²
Noppenzahl/m² • Numero di punti/mq • Puntos de pelo/m²

± 165.480

Pile weight/sqm

Poolinzetgewicht/m² • Poids mis en oeuvre/m²
Poleinsatzgewicht/m² • Peso felpa/mq • Peso de pelo/m²

± 1.265 gr

Total weight/sqm

Totaal gewicht/m² • Poids total/m²
Gesamtwicht/m² • Peso totale/m² • Peso total/m²

± 2.260 gr

EN 13501-1 Fire behaviour

Brandgedrag • Comportement au feu
Brennverhalten • Reazione al fuoco • Resistencia al fuego

B_{fl}-s1

EN 1307-2004 Classification

Classificatie • Classification
Klassifizierung • Classificazione • Clasificación al uso

Class 32

Commercial General

ISO 140/8 1997 Impact sound insulation

± 25 dB

Contactgeluidsisolatie • Isolation aux bruits d'impact
Trittschallverbesserungsmaß • Miglioramento acustico • Aislamiento acústico

TOG Rating

± 1,5

ISO 105 B02 2000 Lightfastness

≥ 5

Lichtechtheid • Solidité à la lumière
Lichtechtheit • Solidità colori alla luce • Solidez del color a la luz

ISO 105 E01 2002 Waterfastness change in colour

≥ 3 - 4

Waterrechtheid verkleuring • Solidité à l'eau changement couleur
Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore
Solidez color al agua cambio de color

ISO 105 E01 2002 Waterfastness staining

≥ 2 - 3

Waterrechtheid uitbloeding • Solidité à l'eau dégorgement
Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore
Solidez color al agua pérdida de color

ISO 105 X12 2001 Rubbingfastness dry

≥ 3 - 4

Wrijfechtheid droog • Solidité au frottement sec
Reibungechtheit trocken • Solidità colori allo sfregamento a secco
Solidez del color a la frotación en seco

ISO 105 X12 2001 Rubbingfastness wet

≥ 3

Wrijfechtheid nat • Solidité au frottement humide
Reibungechtheit nass • Solidità colori allo sfregamento umido
Solidez del color a la frotación en húmedo

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com





▲ SB: MAA.0120 | 400 cm



▲ SB: MAA.0220 | 400 cm



▲ SB: MAA.0250 | 400 cm



▲ SB: MAA.0180 | 400 cm




▲ SB: MAA.0390 | 400 cm



▲ SB: MAA.0590 | 400 cm



▲ SB: MAA.0380 | 400 cm

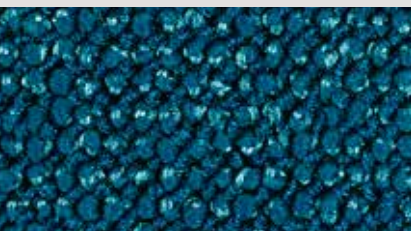

▲ SB: MAA.0710 | 400 cm



▲ SB: MAA.0720 | 400 cm



▲ SB: MAA.0700 | 400 cm



▲ SB: MAA.0770 | 400 cm



▲ SB: MAA.0840 | 400 cm



▲ SB: MAA.0830 | 400 cm



▲ SB: MAA.0810 | 400 cm



▲ SB: MAA.0860 | 400 cm




▲ SB: MAA.0400 | 400 cm

Maccan

Secondary Backing Rugtype • Envers Rücken • Sottofondo	SB	EN 13501-1 Fire behaviour Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco	B_{fl}-s1
Manufacturing process Fabricagemethode • Technique de fabrication Herstellungsart • Tecnica di fabbricazione	1/10" Loop Pile	EN 1307-2004 Classification Classificatie • Classification Classifizierung • Classificazione	Class 33 Commercial Heavy
Pile composition Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa	PA	ISO 140/8 1997 Impact sound insulation Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico	± 20 dB
Primary backing Tuftdoek • Premier dossier Trägermaterial • Tela di supporto	Non woven	ISO 105 B02 2000 Lightfastness Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce	≥ 5
Width Breedte • Largeur Breite • Altezza	± 400 cm	ISO 105 E01 2002 Waterfastness change in colour Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore	≥ 3-4
Effective pile height Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile	± 3,4 mm	ISO 105 E01 2002 Waterfastness staining Waterechtheid uitbloeding • Solidité à l'eau dégorgeement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore	≥ 2-3
Total height Totale dikte • Hauteur totale Gesamthöhe • Spessore totale	± 6,5 mm	ISO 105 X12 2001 Rubbingfastness dry Wrijfechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco	≥ 3-4
Number of knots/sqm Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq	± 90.620	ISO 105 X12 2001 Rubbingfastness wet Wrijfechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido	≥ 3
Pile weight/sqm Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq	± 705 gr		
Total weight/sqm Totaal gewicht/m² • Poids total/m² Gesamtgewicht/m² • Peso totale/m²	± 2.150 gr		

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com

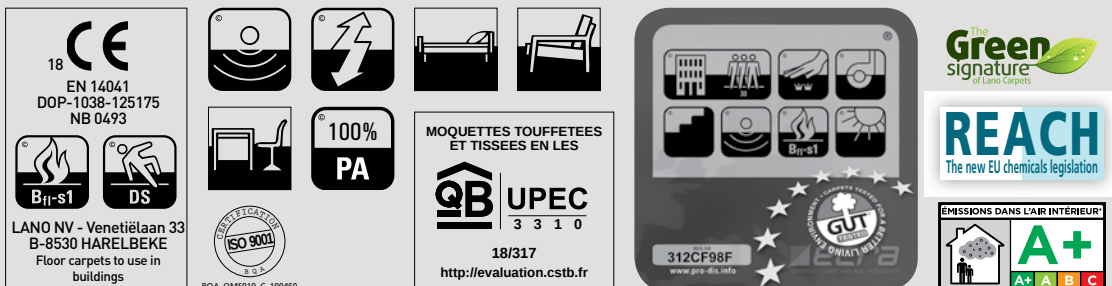

Pearl



▲ SB: PEA.230 | 400 cm



▲ SB: PEA.450 | 400 cm



▲ SB: PEA.440 | 400 cm



▲ SB: PEA.890 | 400 cm



▲ SB: PEA.220 | 400 cm



▲ SB: PEA.340 | 400 cm



▲ SB: PEA.280 | 400 cm



▲ SB: PEA.310 | 400 cm



▲ SB: PEA.840 | 400 cm



▲ SB: PEA.850 | 400 cm



▲ SB: PEA.430 | 400 cm



▲ SB: PEA.250 | 400 cm



▲ SB: PEA.820 | 400 cm



▲ SB: PEA.830 | 400 cm



▲ SB: PEA.740 | 400 cm



▲ SB: PEA.880 | 400 cm

X

A touch of luxury.

Pearl

Secondary Backing	SB
Rugtype • Envers Rücken • Sottofondo • Reverse	
Manufacturing process	tufted, 3/16" cut pile
Fabricagemethode • Technique de fabrication Herstellungsart • Tecnica di fabbricazione • Técnica de fabricación	
Pile composition	PA
Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa • Composición de pelo	
Primary backing	woven
Tuftdoek • Premier dossier Trägermaterial • Tela di supporto • Tela de soporte	
Width	± 400 cm
Breedte • Largeur Breite • Altezza • Ancho	
Effective pile height	± 12 mm
Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo	
Total height	± 14 mm
Totale dikte • Hauteur totale Gesamthöhe • Spessore totale • Altura total	
Number of knots/sqm	± 58.800
Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq • Puntos de pelo/m²	
Pile weight/sqm	± 2.310 gr
Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq • Peso de pelo/m²	
Total weight/sqm	± 3.470 gr
Totaal gewicht/m² • Poids total/m² Gesamtwicht/m² • Peso totale/m² • Peso total/m²	
EN 13501-1 Fire behaviour	B_{fl}-s1
Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco • Resistencia al fuego	

EN 1307-2004 Classification	Class 23/32
Classificatie • Classification Klassifizierung • Classificazione • Clasificación al uso	
DIN 52612 Thermal retention	± 0,184 m²/kW
Warmteoorlaaatweerstand • Résistivité thermique Wärmedurchlaßwiderstand • Resistenza termica • Resistencia térmica	
TOG rating	± 1,84
ISO 105 B02 2000 Lightfastness	≥ 6 - 7
Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce • Solidez del color a la luz	
ISO 105 E01 2002 Waterfastness change in colour	≥ 4 - 5
Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore Solidez color al agua cambio de color	
ISO 105 E01 2002 Waterfastness staining	≥ 3 - 4
Waterechtheid uitbloeding • Solidité à l'eau dégorgement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore Solidez color al agua pérdida de color	
ISO 105 X12 2001 Rubbingfastness dry	≥ 4 - 5
Wrijftechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco Solidez del color a la frotación en seco	
ISO 105 X12 2001 Rubbingfastness wet	≥ 4 - 5
Wrijftechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido Solidez del color a la frotación en húmedo	

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Pleasure




▲ KT: PLE.0250 | 400 & 500 cm



▲ KT: PLE.0040 | 400 & 500 cm




▲ KT: PLE.0880 | 400 & 500 cm



▲ KT: PLE.0240 | 400 & 500 cm



▲ KT: PLE.0260 | 400 & 500 cm



▲ KT: PLE.0840 | 400 & 500 cm



▲ KT: PLE.0220 | 400 & 500 cm



▲ KT: PLE.0620 | 400 & 500 cm



▲ KT: PLE.0860 | 400 & 500 cm



▲ KT: PLE.0830 | 400 & 500 cm



▲ KT: PLE.0820 | 400 & 500 cm



▲ KT: PLE.0810 | 400 & 500 cm




▲ KT: PLE.0760 | 400 & 500 cm



▲ KT: PLE.0780 | 400 & 500 cm



▲ KT: PLE.0020 | 400 & 500 cm



▲ KT: PLE.0180 | 400 & 500 cm

X

A touch of luxury.

Pleasure

Secondary Backing	KT
Rugtype • Envers Rücken • Sottofondo • Reverso	
Manufacturing process	5/64" SAXONY
Fabricagemethode • Technique de fabrication Herstellungsverfahren • Tecnica di fabbricazione • Técnica de fabricación	
Pile composition	PA
Pool Samenstelling • Nature du velours Polmaterial • Composizione felpa • Composición de pelo	
Primary backing	woven
Tuftdoek • Premier dossier Trägermaterial • Tela di supporto • Tela de soporte	
Width	± 400 & 500 cm
Breedte • Largeur Breite • Altezza • Ancho	
Effective pile height	± 9 mm
Nuttige poolhoogte • Hauteur du velours utile Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo	
Total height	± 11.5 mm
Totale dikte • Hauteur totale Gesamthöhe • Spessore totale • Altura total	
Number of knots/sqm	± 262.080
Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq • Puntos de pelo/m²	
Pile weight/sqm	± 1.870 gr
Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq • Peso de pelo/m²	
Total weight/sqm	± 3.090 gr
Totaal gewicht/m² • Poids total/m² Gesamtgewicht/m² • Peso totale/m² • Peso total/m²	

EN 13501-1 Fire behaviour	B_{fl}-s1
Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco • Resistencia al fuego	
EN 1307-2004 Classification	Class 32
Classificatie • Classification Klassifizierung • Classificazione • Clasificación al uso	Commercial General
ISO 140/8 1997 Impact sound insulation	± 25 dB
Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico • Aislamiento acústico	
ISO 105 B02 2000 Lightfastness	≥ 5
Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce • Solidez del color a la luz	
ISO 105 E01 2002 Waterfastness change in colour	≥ 3 - 4
Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore Solidez color al agua cambio de color	
ISO 105 E01 2002 Waterfastness staining	≥ 2 - 3
Waterechtheid uitbloeding • Solidité à l'eau dégorgeement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore Solidez color al agua pérdida de color	
ISO 105 X12 2001 Rubbingfastness dry	≥ 3 - 4
Wrijftechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco Solidez del color a la frotación en seco	
ISO 105 X12 2001 Rubbingfastness wet	≥ 3
Wrijftechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido Solidez del color a la frotación en húmedo	

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Queens

Lano
Carpet Solutions




▲ SB: QUE.0790 | 400 cm



▲ SB: QUE.0760 | 400 cm



▲ SB: QUE.0850 | 400 cm



▲ SB: QUE.0830 | 400 cm



▲ SB: QUE.0800 | 400 cm



▲ SB: QUE.0410 | 400 cm



▲ SB: QUE.0630 | 400 cm



▲ SB: QUE.0810 | 400 cm



▲ SB: QUE.0210 | 400 cm



▲ SB: QUE.0200 | 400 cm




▲ SB: QUE.0270 | 400 cm



▲ SB: QUE.0260 | 400 cm



▲ SB: QUE.0310 | 400 cm



▲ SB: QUE.0100 | 400 cm

Queens

Secondary Backing

Rugtype • Envers
Rücken • Sottofondo

SB

Manufacturing process

Fabricagemethode • Technique de fabrication
Herstellungsart • Tecnica di fabbricazione

1/10" Loop pile

Pile composition

Poolsamenstelling • Nature du velours
Polmaterial • Composizione felpa

PA

Primary backing

Tuftdoek • Premier dossier
Trägermaterial • Tela di supporto

woven

Width

Breedte • Largeur
Breite • Altezza

± 400 cm

Effective pile height

Nuttige poolhoogte • Hauteur de velours utile
Tatsächliche Florhöhe • Spessore felpa utile

± 4,0 mm

Total height

Totale dikte • Hauteur totale
Gesamthöhe • Spessore totale

± 6,2 mm

Number of knots/sqm

Aantal noppen/m² • Nombre de points/m²
Noppenzahl/m² • Numero di punti/mq

± 137.900

Pile weight/sqm

Poolinzetgewicht/m² • Poids mis en oeuvre/m²
Poleinsatzgewicht/m² • Peso felpa/mq

± 750 gr

Total weight/sqm

Totaal gewicht/m² • Poids total/m²
Gesamtgewicht/m² • Peso totale/m²

± 1.900 gr

EN 13501-1 Fire behaviour

Brandgedrag • Comportement au feu
Brennverhalten • Reazione al fuoco

B_{fl}-s1

EN 1307-2004 Classification

Classificatie • Classification
Klassifizierung • Classificazione

Class 33
Commercial Heavy

ISO 140/8 1997 Impact sound insulation

Contactgeluidsisolatie • Isolation aux bruits d'impact
Trittschallverbesserungsmaß • Miglioramento acustico

± 20 dB

DIN 52612 Thermal retention

Warmteoorlaatweerstand • Résistivité thermique
Wärmedurchlaßwiderstand • Resistenza termica

± 0,11 m²/kW

TOG rating

± 1,1

ISO 105 B02 2000 Lightfastness

Lichtechtheid • Solidité à la lumière
Lichtechtheit • Solidità colori alla luce

≥ 5

ISO 105 E01 2002 Waterfastness change in colour

Waterechtheid verkleuring • Solidité à l'eau changement couleur
Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore

≥ 3-4

ISO 105 E01 2002 Waterfastness staining

Waterechtheid uitbloeding • Solidité à l'eau dégorgeement
Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore

≥ 2-3

ISO 105 X12 2001 Rubbingfastness dry

Wrijftechtheid droog • Solidité au frottement sec
Reibungechtheit trocken • Solidità colori allo sfregamento a secco


≥ 3-4

ISO 105 X12 2001 Rubbingfastness wet

Wrijftechtheid nat • Solidité au frottement humide
Reibungechtheit nass • Solidità colori allo sfregamento umido

≥ 3

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Satine



▲ KT: SAT.0731 | 400 & 500 cm



▲ KT: SAT.0791 | 400 & 500 cm



▲ KT: SAT.0141 | 400 & 500 cm



▲ KT: SAT.0121 | 400 & 500 cm



▲ KT: SAT.0101 | 400 & 500 cm



▲ KT: SAT.0751 | 400 & 500 cm



▲ KT: SAT.0572 | 400 & 500 cm




▲ KT: SAT.0372 | 400 & 500 cm



▲ KT: SAT.0371 | 400 & 500 cm



▲ KT: SAT.0321 | 400 & 500 cm



▲ KT: SAT.0662 | 400 & 500 cm



▲ KT: SAT.0031 | 400 & 500 cm




▲ KT: SAT.0052 | 400 & 500 cm



▲ KT: SAT.0081 | 400 & 500 cm



▲ KT: SAT.0091 | 400 & 500 cm



▲ KT: SAT.0250 | 400 & 500 cm



▲ KT: SAT.0230 | 400 & 500 cm



▲ KT: SAT.0221 | 400 & 500 cm



▲ KT: SAT.0152 | 400 & 500 cm



▲ KT: SAT.0411 | 400 & 500 cm




▲ KT: SAT.0240 | 400 & 500 cm



▲ KT: SAT.0430 | 400 & 500 cm



▲ KT: SAT.0280 | 400 & 500 cm



▲ KT: SAT.0200 | 400 & 500 cm




▲ KT: SAT.0482 | 400 & 500 cm



▲ KT: SAT.0880 | 400 & 500 cm



▲ KT: SAT.0850 | 400 & 500 cm



▲ KT: SAT.0841 | 400 & 500 cm



▲ KT: SAT.0820 | 400 & 500 cm



▲ KT: SAT.0800 | 400 & 500 cm

X

A touch of luxury.

Satine

Secondary Backing Rugtype • Envers Rücken • Sottofondo	KT
Manufacturing process Fabricagemethode • Technique de fabrication Herstellungsart • Tecnica di fabbricazione	tufted, 1/10" SAXONY
Pile composition Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa	PA
Primary backing Tuftdoek • Premier dossier Trägermaterial • Tela di supporto	woven
Width Breedte • Largeur Breite • Altezza	± 400 & 500 cm
Effective pile height Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile	± 7,0 mm
Total height Totale dikte • Hauteur totale Gesamthöhe • Spessore totale	± 9,5 mm
Number of knots/sqm Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq	± 165.480
Pile weight/sqm Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq	± 1.470 gr
Total weight/sqm Totaal gewicht/m² • Poids total/m² Gesamtwegicht/m² • Peso totale/m²	± 2.630 gr
EN 13501-1 Fire behaviour Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco	C_{fl}-s1
EN 1307-2004 Classification Classificatie • Classification Klassifizierung • Classificazione	Class 32 Domestic Heavy Commercial General

ISO 140/8 1997 Impact sound insulation Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico	± 24 dB
ISO 354 Sound absorption α_s Geluidsdempingsvermogen α_s • Absorption phonique α_s Schallabsorptionsgrad α_s • Grado d'assorbimento acustico α_s	± 0,47 (1000 Hz)
ISO 11654 Sound absorption α_w Geluidsdempingsvermogen α_w • Absorption phonique α_w Schallabsorptionsgrad α_w • Grado d'assorbimento acustico α_w	± 0,25
DIN 52612 Thermal retention Warmtedoorlaatweerstand • Résistivité thermique Wärmedurchlaßwiderstand • Resistenza termica	± 0,079 m²/kW
TOG rating	± 0,79
ISO 105 B02 2000 Lightfastness Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce	≥ 5
ISO 105 E01 2002 Waterfastness change in colour Waterechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore	≥ 4-5
ISO 105 E01 2002 Waterfastness staining Waterechtheid uitbloeding • Solidité à l'eau dégorgeement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore	≥ 4-5
ISO 105 X12 2001 Rubbingfastness dry Wrijftechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco	≥ 4-5
ISO 105 X12 2001 Rubbingfastness wet Wrijftechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido	≥ 4-5
Ce produit s'inscrit dans la démarche HQE (F.D.E.S. selon la norme NF P01-10 disponible sur demande). F.D.E.S. = fiche de données environnementales et sanitaires.	HQE

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Serenity



▲ KT: **LSER.0810** | 400 & 500 cm



▲ KT: **LSER.0780** | 400 & 500 cm



▲ KT: **LSER.0850** | 400 & 500 cm




▲ KT: **LSER.0180** | 400 & 500 cm



▲ KT: **LSER.0840** | 400 & 500 cm



▲ KT: **LSER.0670** | 400 & 500 cm



▲ KT: **LSER.0870** | 400 & 500 cm



▲ KT: **LSER.0140** | 400 & 500 cm



▲ KT: **LSER.0830** | 400 & 500 cm




▲ KT: **LSER.0820** | 400 & 500 cm



▲ KT: **LSER.0870** | 400 & 500 cm



▲ KT: **LSER.0130** | 400 & 500 cm



▲ KT: **LSER.0880** | 400 & 500 cm



▲ KT: **LSER.0630** | 400 & 500 cm



▲ KT: **LSER.0540** | 400 & 500 cm



▲ KT: **LSER.0100** | 400 & 500 cm



▲ KT: **LSER.0250** | 400 & 500 cm



▲ KT: **LSER.0260** | 400 & 500 cm



▲ KT: **LSER.0330** | 400 & 500 cm



▲ KT: **LSER.0120** | 400 & 500 cm

X

A touch of luxury.

Serenity

Secondary Backing

Rugtype • Envers
Rücken • Sottofondo • Reverso

KT

Manufacturing process

Fabricagemethode • Technique de fabrication
Herstellungsverfahren • Tecnica di fabbricazione • Técnica de fabricación

1/10" cut pile

Pile composition

Poolsamenstelling • Nature du velours
Polmaterial • Composizione felpa • Composición de pelo

PA

Primary backing

Tuftdoek • Premier dossier
Trägermaterial • Tela di supporto • Tela de soporte

woven

Width

Breedte • Largeur
Breite • Altezza • Ancho

± 400 & 500 cm

Effective pile height

Nuttige poolhoogte • Hauteur de velours utile
Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo

± 10,0 mm

Total height

Totale dikte • Hauteur totale
Gesamthöhe • Spessore totale • Altura total

± 12,5 mm

Number of knots/sqm

Aantal noppen/m² • Nombre de points/m²
Noppenzahl/m² • Numero di punti/mq • Puntos de pelo/m²

± 200.940

Pile weight/sqm

Poolinzetgewicht/m² • Poids mis en oeuvre/m²
Poleinsatzgewicht/m² • Peso felpa/mq • Peso de pelo/m²

± 2.200 gr

Total weight/sqm

Totaal gewicht/m² • Poids total/m²
Gesamtwicht/m² • Peso totale/m² • Peso total/m²

± 3.270 gr

EN 13501-1 Fire behaviour

Brandgedrag • Comportement au feu
Brennverhalten • Reazione al fuoco • Resistencia al fuego

B_{fl}-s1

EN 1307-2004 Classification

Classificatie • Classification
Klassifizierung • Classificazione • Clasificación al uso

Class 23

Domestic Heavy

ISO 140/8 1997 Impact sound insulation

Contactgeluidsisolatie • Isolation aux bruits d'impact
Trittschallverbesserungsmaß • Miglioramento acustico • Aislamiento acústico

± 25 dB

TOG Rating

± 1,6

ISO 105 B02 2000 Lightfastness

Lichtechtheid • Solidité à la lumière
Lichtechtheit • Solidità colori alla luce • Solidez del color a la luz

≥ 5

ISO 105 E01 2002 Waterfastness change in colour

Waterrechtheid verkleuring • Solidité à l'eau changement couleur
Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore
Solidez color al agua cambio de color

≥ 3 - 4

ISO 105 E01 2002 Waterfastness staining

Waterrechtheid uitbloeding • Solidité à l'eau dégorgement
Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore
Solidez color al agua pérdida de color

≥ 2 - 3

ISO 105 X12 2001 Rubbingfastness dry

Wrijftechtheid droog • Solidité au frottement sec
Reibungechtheit trocken • Solidità colori allo sfregamento a secco
Solidez del color a la frotación en seco


≥ 3 - 4

ISO 105 X12 2001 Rubbingfastness wet

Wrijftechtheid nat • Solidité au frottement humide
Reibungechtheit nass • Solidità colori allo sfregamento umido
Solidez del color a la frotación en húmedo

≥ 3

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



Zen


Lano
Carpet Solutions



▲ SB: ZEN.0280 | 400 cm



▲ SB: ZEN.0820 | 400 cm

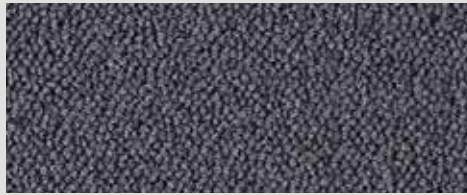


▲ SB: ZEN.0832 | 400 cm




▲ SB: ZEN.0812 | 400 cm




▲ SB: ZEN.0800 | 400 cm




▲ SB: ZEN.0871 | 400 cm



▲ SB: ZEN.0840 | 400 cm



▲ SB: ZEN.0862 | 400 cm




▲ SB: ZEN.0742 | 400 cm




▲ SB: ZEN.0762 | 400 cm



▲ SB: ZEN.0790 | 400 cm



▲ SB: ZEN.0872 | 400 cm



▲ SB: ZEN.0552 | 400 cm




▲ SB: ZEN.0830 | 400 cm



▲ SB: ZEN.0810 | 400 cm



▲ SB: ZEN.0774 | 400 cm



▲ SB: ZEN.0782 | 400 cm




▲ SB: ZEN.0434 | 400 cm



▲ SB: ZEN.0850 | 400 cm



▲ SB: ZEN.0511 | 400 cm



▲ SB: ZEN.0624 | 400 cm



▲ SB: ZEN.0734 | 400 cm



▲ SB: ZEN.0711 | 400 cm




▲ SB: ZEN.0451 | 400 cm



▲ SB: ZEN.0164 | 400 cm



▲ SB: ZEN.0544 | 400 cm



▲ SB: ZEN.0301 | 400 cm



▲ SB: ZEN.0109 | 400 cm




▲ SB: ZEN.0124 | 400 cm




▲ SB: ZEN.0261 | 400 cm



▲ SB: ZEN.0271 | 400 cm



▲ SB: ZEN.0311 | 400 cm




▲ SB: ZEN.0141 | 400 cm



▲ SB: ZEN.0110 | 400 cm




▲ SB: ZEN.0054 | 400 cm



▲ SB: ZEN.0182 | 400 cm



▲ SB: ZEN.0423 | 400 cm



▲ SB: ZEN.0061 | 400 cm



▲ SB: ZEN.0204 | 400 cm



▲ SB: ZEN.0041 | 400 cm

Zen

Secondary Backing Rugtype • Envers Rücken • Sottotondo • Reverso	SB
Manufacturing process Fabricagemethode • Technique de fabrication Herstellungsverfahren • Tecnica di fabbricazione • Técnica de fabricación	tufted, 1/10" saxony
Pile composition Poolsamenstelling • Nature du velours Polmaterial • Composizione felpa • Composición de pelo	PA
Primary backing Tuftdoek • Premier dossier Trägermaterial • Tela di supporto • Tela de soporte	non woven
Width Breedte • Largeur Breite • Altezza • Ancho	± 400 cm
Effective pile height Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo	± 6 mm
Total height Totale dikte • Hauteur totale Gesamthöhe • Spessore totale • Altura total	± 8,5 mm
Number of knots/sqm Aantal noppen/m² • Nombre de points/m² Noppenzahl/m² • Numero di punti/mq • Puntos de pelo/m²	± 200.940
Pile weight/sqm Poolinzetgewicht/m² • Poids mis en oeuvre/m² Poleinsatzgewicht/m² • Peso felpa/mq • Peso de pelo/m²	± 1.000 gr
Total weight/sqm Totaal gewicht/m² • Poids total/m² Gesamtwegicht/m² • Peso totale/m² • Peso total/m²	± 2.160 gr
EN 13501-1 Fire behaviour Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco • Resistencia al fuego	B_f-s1
EN 1307-2004 Classification Classificatie • Classification Klassifizierung • Classificazione • Clasificación al uso	Class 33 Commercial Heavy
ISO 140/8 1997 Impact sound insulation Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico	± 28 dB

ISO 354 Sound absorption α_s Geluidsdempingsvermogen α_s • Absorption phonique α_s Schallabsorptionsgrad α_s • Grado d'assorbimento acustico α_s	± 0,3 (1000 Hz)
---	------------------------

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



01
EN 14041
DOP-1038-111910
EN 1611



LANO NV - Venetiëlaan 33
B-8530 HARELBEKE
Floor carpets to use in
buildings





ISO 9001
BQA_QMS019_C_199460

